


Lightweight Half-Cell Module DAS-LF132PA

455W~475W

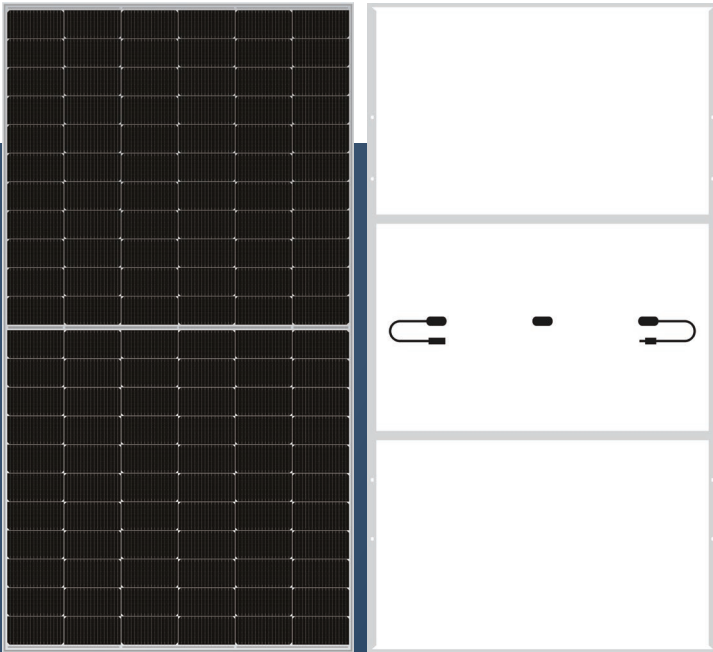

Key Features

- Lightweight**
 Optimized composite materials, 50% lighter at the same power
- Half Cell, SMBB Technology**
 Series-then-parallel cell connection design, more reliable soldering technology
- Low NMOT**
 As low as 43°C, improving the power generation efficiency
- Easy transportation and installation**
 Original design making it far less costly for transportation and installation
- Customization**
 Customization for various scenarios, high additional value
- Superior Low Irradiance Performance**
 Excellent low irradiance performance, increase power generation in low-light conditions like mornings, evenings and cloudy days

Maximum Power Output

475W

Maximum Module Efficiency

19.7%

Power Output Tolerance

0~+5W


Product and Quality Certifications

IEC 61215, IEC 61730

ISO 9001: Quality Management System

ISO 14001: Environment Management System


ISO 45001: Occupational Health and Safety Management System

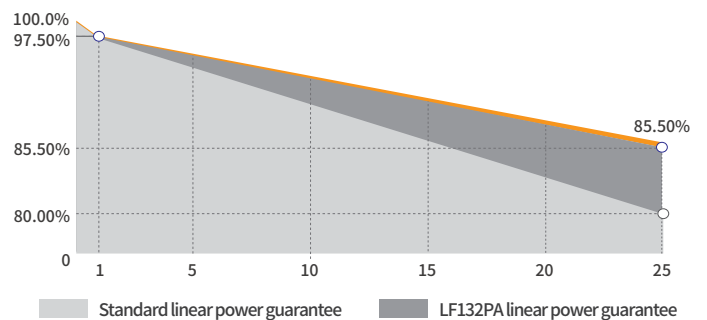


Leading product and power warranty

-2.50% 1st-year Degradation **-0.50%** Annual Degradation **12** Materials and workmanship warranty **25** Linear power warranty

Engineering Drawing (mm)

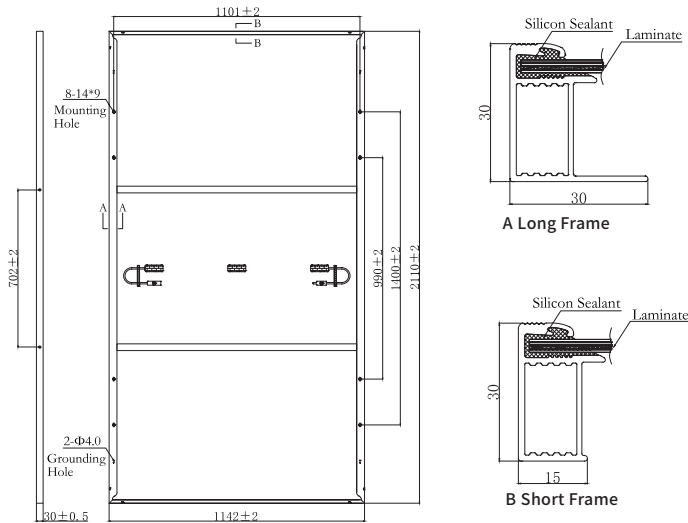

Characteristic Curves(470W)

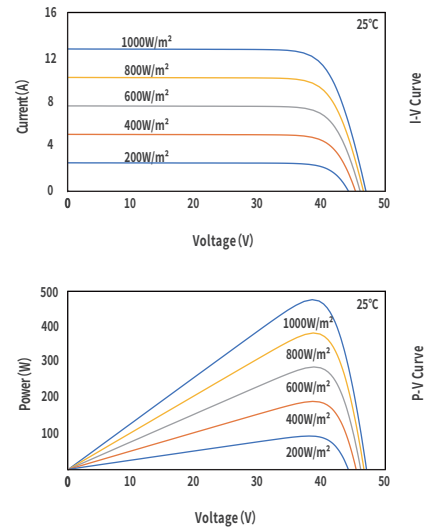

Electrical Parameters (STC *)

Nominal Max. Power(Pmax/W)	455	460	465	470	475
Open Circuit Voltage(Voc/V)	45.50	45.65	45.79	45.93	46.06
Short Circuit Current(Isc/A)	12.67	12.76	12.85	12.93	13.02
Operating Voltage(Vmp/V)	37.72	37.87	38.01	38.15	38.28
Operating Current(Imp/A)	12.06	12.15	12.24	12.32	12.41
Efficiency(%)	18.9	19.1	19.3	19.5	19.7

STC *: Irradiance = 1000 W/m², Cell Temperature = 25°C, AM = 1.5
Test condition is based on the front side

Electrical Parameters (NMOT *)

Nominal Max. Power(Pmax/W)	341.7	345.5	349.2	353.0	356.7
Open Circuit Voltage(Voc/V)	43.35	43.50	43.63	43.76	43.89
Short Circuit Current(Isc/A)	10.21	10.28	10.35	10.42	10.49
Operating Voltage(Vmp/V)	35.16	35.30	35.43	35.57	35.69
Operating Current(Imp/A)	9.72	9.79	9.86	9.93	9.99

NMOT *: Irradiance = 800 W/m², Ambient Temperature = 20°C, AM = 1.5,
Wind Speed = 1 m/s
Test condition is based on the front side

Temperature Coefficients

Short Circuit Current(Isc)	+0.038%/°C
Open Circuit Voltage(Voc)	-0.262%/°C
Nominal Max. Power(Pmax)	-0.341%/°C
NMOT	43±2°C

Mechanical Parameters

Cell Type	P Type
Module Size	2110×1142×30mm
Module Thickness	30mm
Module Weight	11.3Kg
Output Cable	4mm ² , cable length 250mm (can be customized)
Connector	MC4 Similar
Junction Box	IP68, 3 bypass diodes
Frame	Anodized aluminium alloy

Operating Parameters

Max. System Voltage	DC1500V
Power Tolerance	0 ~ +5 W
Operating Temperature	-40°C ~ +85°C
Max. Fuse Rated Current	22A
Static Load	Front 5400Pa, Back 2400Pa

Packing Data

Packing Type	20'GP	40'HQ
Piece/Pallet	36	36
Pallet/Container	5	22
Piece/Container	180	792